


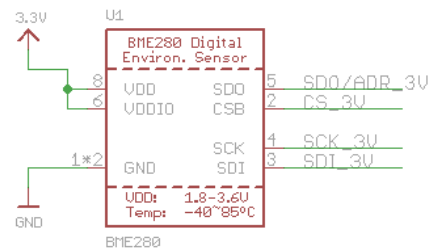



LEVEL SHIFTING (5V <--> 3V)

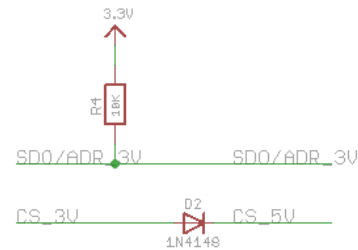

For SPI set CSB low at startup
SDO=MISO, SDI=MOSI, SCK=SCK, CSB=CS/SSSEL

For I2C leave CSB pulled high (default value)
SDI=SDA, SCK=SCL

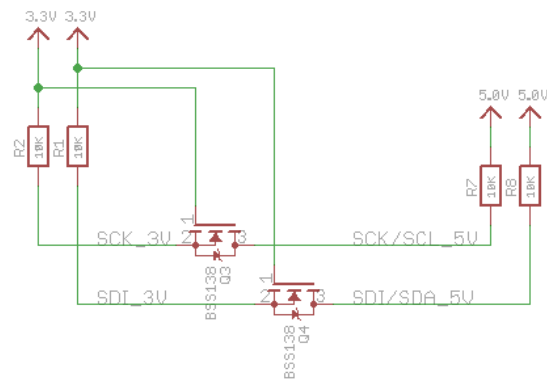

Adafruit_BME280_SPI_REV-B

6/21/2015 2:19:58 PM

Sheet: 1/1

Drawing: >AUTHOR

Adafruit Industries